Kingfisher Lighting

Datasheet



Viva-City Pro

Specification Text

The luminaire shall be manufactured from high pressure die-cast aluminium. It shall have an LED efficacy of up to 141 luminaire lm/W and will be capable of producing up to 24000 luminaire lumens at 4000K with a CRI >70. It shall have a radial distribution and is IP66 and IK10.

Specification

Weight:	5.2 - 9.5 kg
Material:	Die-cast Aluminium
Paint Finish:	Anthracite Grey

Key Features

- 15W - 180W
- 1,995 - 24,000 Luminaire Lumens
- Efficacy up to 141 lm/W
- 4000K, CRI >70
- Lifetime >100,000hr
- Asymmetrical
- Post top tilt +/- 15° degrees at 5° incements
- Side entry tilt +/- 10° degrees at 5° incements

Kingfisher Lighting

LED | IP66 | IK10

Optics

AY70





FL50





FW70





Dimensions

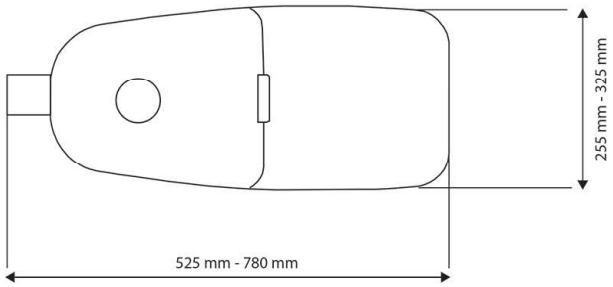



Power	L mm	W mm	H mm
15W	525	225	105
40W / 60W / 80W	625	290	105
120W / 180W	780	325	105

All measurements in mm

Code	Power	Light Source	Luminaire Lumens	Optic	CCT(K)	IP	IK	Weight (kg)	Paint Finish
VCYP-T3A-4.3-15D	15W	LED	1995	Asymmetrical Street Optic	4000	IP66	IK10	5.2	Anthracite Grey
VCYP-T3A-4.8-40D	40W	LED	5400		4000	IP66	IK10	6.5	Anthracite Grey
VCYP-T3A-4.6-60D2	60W	LED	8450		4000	IP66	IK10	6.6	Anthracite Grey
VCYP-T3A-4.8-80D	80W	LED	10650		4000	IP66	IK10	6.7	Anthracite Grey
VCYP-T3A-4.6-120D	120W	LED	16250		4000	IP66	IK10	9.4	Anthracite Grey
VCYP-T3A-4.8-180D	180W	LED	22900		4000	IP66	IK10	9.5	Anthracite Grey
VCYP-T4A-4.3-15D	15W	LED	1995	Asymmetrical Area Optic	4000	IP66	IK10	5.2	Anthracite Grey
VCYP-T4A-4.8-40D	40W	LED	5400		4000	IP66	IK10	6.5	Anthracite Grey
VCYP-T4A-4.6-60D2	60W	LED	8450		4000	IP66	IK10	6.6	Anthracite Grey
VCYP-T4A-4.8-80D	80W	LED	10650		4000	IP66	IK10	6.7	Anthracite Grey
VCYP-T4A-4.6-120D	120W	LED	16250		4000	IP66	IK10	9.4	Anthracite Grey
VCYP-T4A-4.8-180D	180W	LED	22900		4000	IP66	IK10	9.5	Anthracite Grey
VCYP-FL50-4.3-15D	15W	LED	2062	Asymmetrical Flood Optic - 50°	4000	IP66	IK10	5.2	Anthracite Grey
VCYP-FL50-4.8-40D	40W	LED	5659		4000	IP66	IK10	6.5	Anthracite Grey
VCYP-FL50-4.6-60D2	60W	LED	7944		4000	IP66	IK10	6.6	Anthracite Grey
VCYP-FL50-4.8-80D	80W	LED	11162		4000	IP66	IK10	6.7	Anthracite Grey
VCYP-FL50-4.6-120D	120W	LED	17031		4000	IP66	IK10	9.4	Anthracite Grey
VCYP-FL50-4.8-180D	180W	LED	24000		4000	IP66	IK10	9.5	Anthracite Grey
VCYP-AY70-4.3-15D	15W	LED	1983	Asymmetrical Street Optic - 70°	4000	IP66	IK10	5.2	Anthracite Grey
VCYP-AY70-4.8-40D	40.0	LED	5310		4000	IP66	IK10	6.5	Anthracite Grey
VCYP-AY70-4.6-60D2	60W	LED	7454		4000	IP66	IK10	6.6	Anthracite Grey
VCYP-AY70-4.8-80D	80W	LED	10473		4000	IP66	IK10	6.7	Anthracite Grey
VCYP-AY70-4.6-120D	120W	LED	15980		4000	IP66	IK10	9.4	Anthracite Grey
VCYP-AY70-4.8-180D	180W	LED	22519		4000	IP66	IK10	9.5	Anthracite Grey
VCYP-FW70-4.3-15D	15W	LED	1926	Asymmetrical Area Optic - 70°	4000	IP66	IK10	5.2	Anthracite Grey
VCYP-FW70-4.8-40D	40W	LED	5493		4000	IP66	IK10	6.5	Anthracite Grey
VCYP-FW70-4.6-60D2	60W	LED	7710		4000	IP66	IK10	6.6	Anthracite Grey
VCYP-FW70-4.8-80D	80W	LED	10833		4000	IP66	IK10	6.7	Anthracite Grey
VCYP-FW70-4.6-120D	120W	LED	16530		4000	IP66	IK10	9.4	Anthracite Grey
VCYP-FW70-4.8-180D	180W	LED	23294		4000	IP66	IK10	9.5	Anthracite Grey





Accessories / Options

- Photocell option
- Dimming option

Mounting Options

- 60mm Post-top
- 60mm Side-entry