
Specification

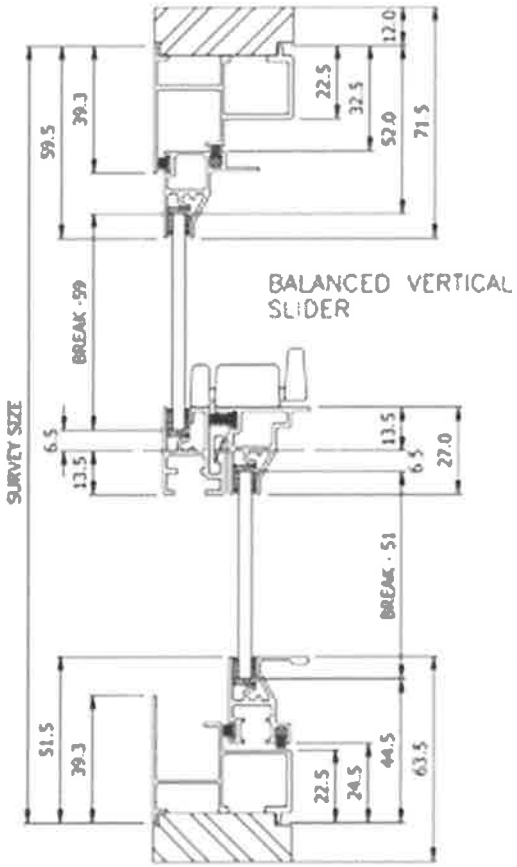

Notes:

1. Spring balance is fitted with a 'lift block' to allow sashes to tilt inwards for cleaning.

2. For unequal breaks bottom break must always exceed top break.
If top & bottom break vary by more than 100mm, horns will be fitted to top sash.

3. Width must not exceed height by more than a ratio of 1:2.3

