EXTERNAL DOOR SCHEDULE

All glazing below 800mm height & opening door to be toughened & heat soaked, laminated safety glazing (6mm laminate or similar approved).
To be stamped in accordance with BS 6206:1981.
Installed units with trickle vents to external doors and to comply with Approved document F
All new external doors to achieve u-value not less than 1.00 w/m2k and meet the requirements of PAS24:2012

Door No.	Room	Structural opening (w x h)	Specification - To be confirmed by Client
EDG-B1-01	Foyer	-	Retain existing door and rehang
EDG-B1-02	Hall	910 x 2100mm	Everest Timber Entrance Door (FP38) with upper glazing.
EDG-B1-04	Foyer		Existing door relocated
EDG-B2-01	Reception	930 x 2140mm Contractor to check on site	Existing door replaced to match residential
EDG-B2-03	Office	900 x 2100mm	Existing door permanently sealed

EDG-B1-02



EDG-B2-01

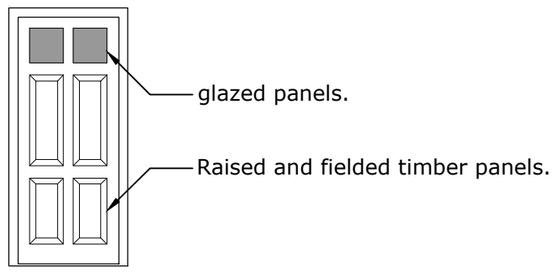

Doors amended on site following discussions with joiner and conservation officer, EDG-B2-01 amended for security.

INTERNAL DOOR SCHEDULE

Contractor to ensure all existing doors noted on the fire strategy plans have a minimum 30 minute fire rated and are smoke sealed where noted. If not, replace existing door with appropriate FD30S door
All existing FD30S doors to be fitted with self closing devices with the exception of store cupboards

ID Number	Area	Room	Structural opening (w x h)	Specification - client to confirm	Ironmongery	Fire Rating	Vision Panel	Self-closing
IDG-B1-01	Unit 1	WC	725 x 2100mm Contractor to check on site	Howdens Spey Plywood FD30 fire door painted White	To match existing style - TBC by client	FD30S	N/A	Yes
IDG-B1-02	Foyer	WC	1010 x 2100mm	Howdens Spey Plywood FD30 fire door painted White	To match existing style - TBC by client	FD30S	N/A	Yes
IDG-B1-03	Foyer	Hall	N/A	Existing door relocated	N/A	-	-	Yes
IDG-B1-04	Unit 1	Tea Making	910 x 2100mm	Howdens Spey Plywood 20G clear glazed flush fire door painted White	To match existing style - TBC by client	FD30	Yes	Yes
IDG-B1-05	Unit 1	-	1010 x 2100mm	Howdens Spey Plywood 20G clear glazed flush fire door painted White	To match existing style - TBC by client	FD30S	Yes	Yes
IDG-B1-06	Unit 1	Storage	N/A	Existing door rehanded	N/A	-	-	-
IDG-B1-07	Residential	WC	810 x 2100mm	Howdens Spey Plywood FD30 fire door painted White	To match existing style - TBC by client	FD30S	N/A	Yes
IDG-B1-08	Residential	Snug	910 x 2100mm	Howdens Colonial White grained 6 Panel moulded internal door	To match existing style - TBC by client	-	N/A	-
IDG-B1-09	Residential	Sitting Area	910 x 2100mm	Howdens Colonial White grained 6 Panel moulded internal door	To match existing style - TBC by client	-	N/A	-
IDG-B1-10	Residential	Utility	810 x 2100mm	Howdens Colonial White grained 6 Panel moulded internal door	To match existing style - TBC by client	-	N/A	-
IDF-B1-01	Unit 3	-	910 x 2100mm	Howdens Spey Plywood FD30 fire door painted White	To match existing style - TBC by client	FD30S	-	Yes
IDF-B1-02	Landing	Lobby	910 x 2100mm	Howdens Spey Plywood FD30 fire door painted White	To match existing style - TBC by client	FD30S	Yes	Yes
IDF-B1-03	Residential	Bathroom	810 x 2100mm	Howdens Colonial White grained 6 Panel moulded internal door	To match existing style - TBC by client	-	N/A	-
IDF-B1-04	Residential	Bedroom 2	910 x 2100mm	Howdens Colonial White grained 6 Panel moulded internal door	To match existing style - TBC by client	-	N/A	-
IDF-B1-05	Residential	Master Bedroom 1	910 x 2100mm	Howdens Colonial White grained 6 Panel moulded internal door	To match existing style - TBC by client	-	N/A	-
IDF-B1-06	Unit 2	Kitchen	910 x 2100mm	Howdens Spey Plywood FD30 fire door painted White	To match existing style - TBC by client	FD30S	Yes	Yes
IDF-B1-07	Residential		810 x 2100mm	Howdens Colonial White grained 6 Panel moulded internal door	To match existing style - TBC by client	-	-	-
IDG-B2-01	-	Office	910 x 2100mm Contractor to check on site	Howdens Spey Plywood flush door painted White	To match existing style - TBC by client	-	-	-
IDG-B2-02	-	Reception	900 x 2100mm Contractor to check on site	Howdens Spey Plywood flush door painted White	To match existing style - TBC by client	-	-	-
IDG-B2-03	-	WC	810 x 2100mm	Howdens Spey Plywood flush door painted White	To match existing style - TBC by client	-	-	-
IDG-B2-04	-	Tea Making	810 x 2100mm	Howdens Spey Plywood 20G clear glazed flush fire door painted White	To match existing style - TBC by client	FD30	Yes	Yes

Notes:
1. Do not under any circumstances scale from this drawing for the purpose of tender or construction, use figured dimensions only.
2. All dimensions are in mm unless otherwise stated and are, unless otherwise stated, to the face of unfinished plasterboard or similar (ie. does not include final skim and/or other decoration).
3. This drawing is not to be used for the purposes of Tender or Construction except where specifically identified for such use in the Drawing Status section of this drawing.
4. All existing dimensions are to be verified on site by the contractor before any work commences.
5. All existing wall construction and other hidden elements are assumed and are to be verified on site by the contractor before any work commences.
6. Any ambiguities, omissions or errors on this drawing are to be notified immediately to Indigo Architecture before work commences on site.
7. This drawing is to be read in conjunction with all other relevant Architectural, Structural, Civils, M&E Services and any other specialist supplier drawings and specifications.
8. All existing services are to be checked and confirmed on site by the contractor before any work commences.
9. The contractor is not to commence any works on site until seeking and obtaining confirmation that all relevant pre-commencement conditions have been discharged appropriately.
10. This drawing is the property of Indigo Architecture Ltd. and is issued strictly for use on the project for which it is provided and is issued on the condition that it is not copied, reproduced, retained or disclosed to any unauthorised person, either wholly or in part, without the express written consent of Indigo Architecture Ltd.

Rev:	Description:	By:	Date:
C	Discharge of Conditions	ASM	27.08.2025
B	Updated following builidng controls comments	ABM	10.05.2022
A	Building regulations	ABM	10.02.2022

Indigo Architecture
Darley Abbey Stables, Abbey Yard, Darley Abbey, DE22 1DS
t: 0133 254 1691
e: hello@indigo-architecture.co.uk

Project Title:
COND/2025/0096
The Hollies
105 Bridge St
Belper
DE56 1BA

Drawing Title:
Door Schedule for Discharge of Planning Conditions Application

Drawing No: 0284-3-41-00
Revision: C
Scale: NTS
Designed by: ABM/TDS
Stage: 3
Sheet Size: A2
Checked by: CB
Date: 17.12.21

Drawing Status:
COND/2005/0096 FOR PLANNING CONDITIONS DISCHARGE