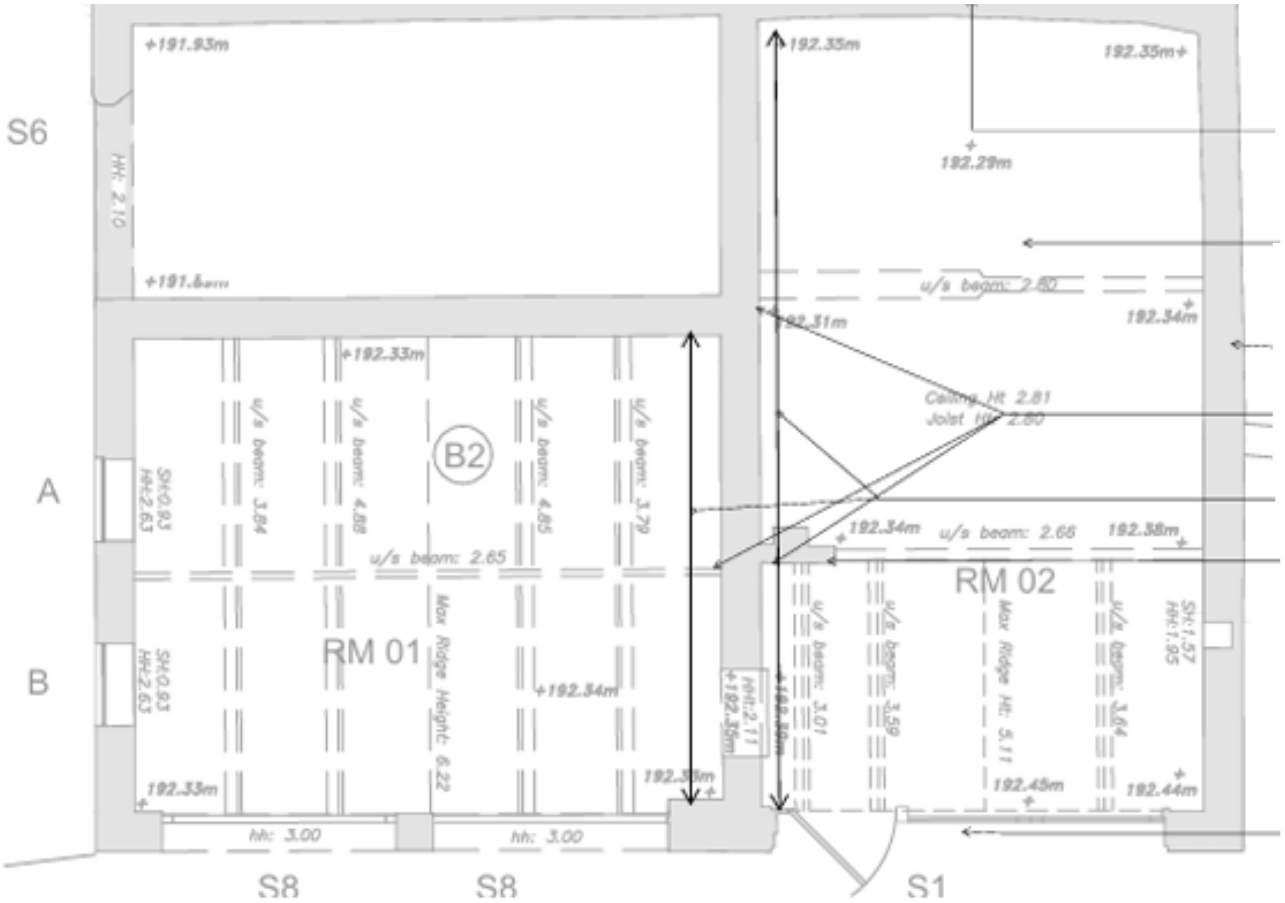


Existing rubble filled gable wall is significantly out of plumb – to be rebuilt like for like using site won stone with NHL2 mortar

Roof to be rebuilt

Existing rubble filled wall to be rebuilt as elevation. New 100hx200w hardwood wall plate to be installed and tied to trusses

Trusses to be realigned and repaired with shoe repair

Valley rafters to be repaired

Pier to be removed

Existing cavity gable wall to be dismantled and rebuilt on new 2No. 152x152x30 UCs bolted together at 600 centres with flashing and timber cover plate by others. Existing stone façade to be reused. Backing brick is not original and can be replaced.

Scale 1:100