THIS DRAWING IS COPYRIGHT TO AV DANZER LTD AND MAY NOT BE REPRODUCED IN ANY OTHER FORM WHATSOEVER WITHOUT PRIOR EXPRESS WRITTEN CONSENT

APPROVED

DATE .....

SIGNED.....

NOTES

1. ALL DIMENSIONS IN MM
2. ALL DIMENSIONS TO BE CHECKED AND VERIFIED
3. DO NOT SCALE; IF IN DOUBT ASK
4. DRAWING TO BE READ IN CONJUNCTION WITH AV DANZER SPECIFICATION
5. REPORT ANY DISCREPANCIES TO THE DRAWING OFFICE

NORTH

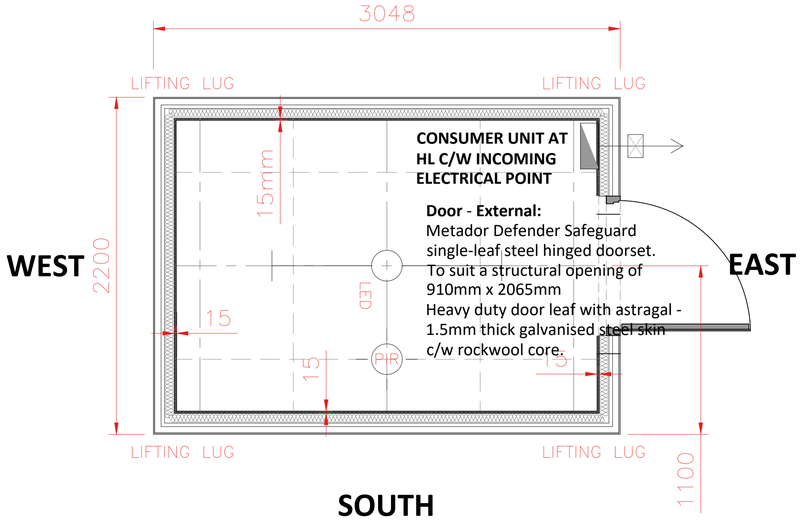

SOUTH

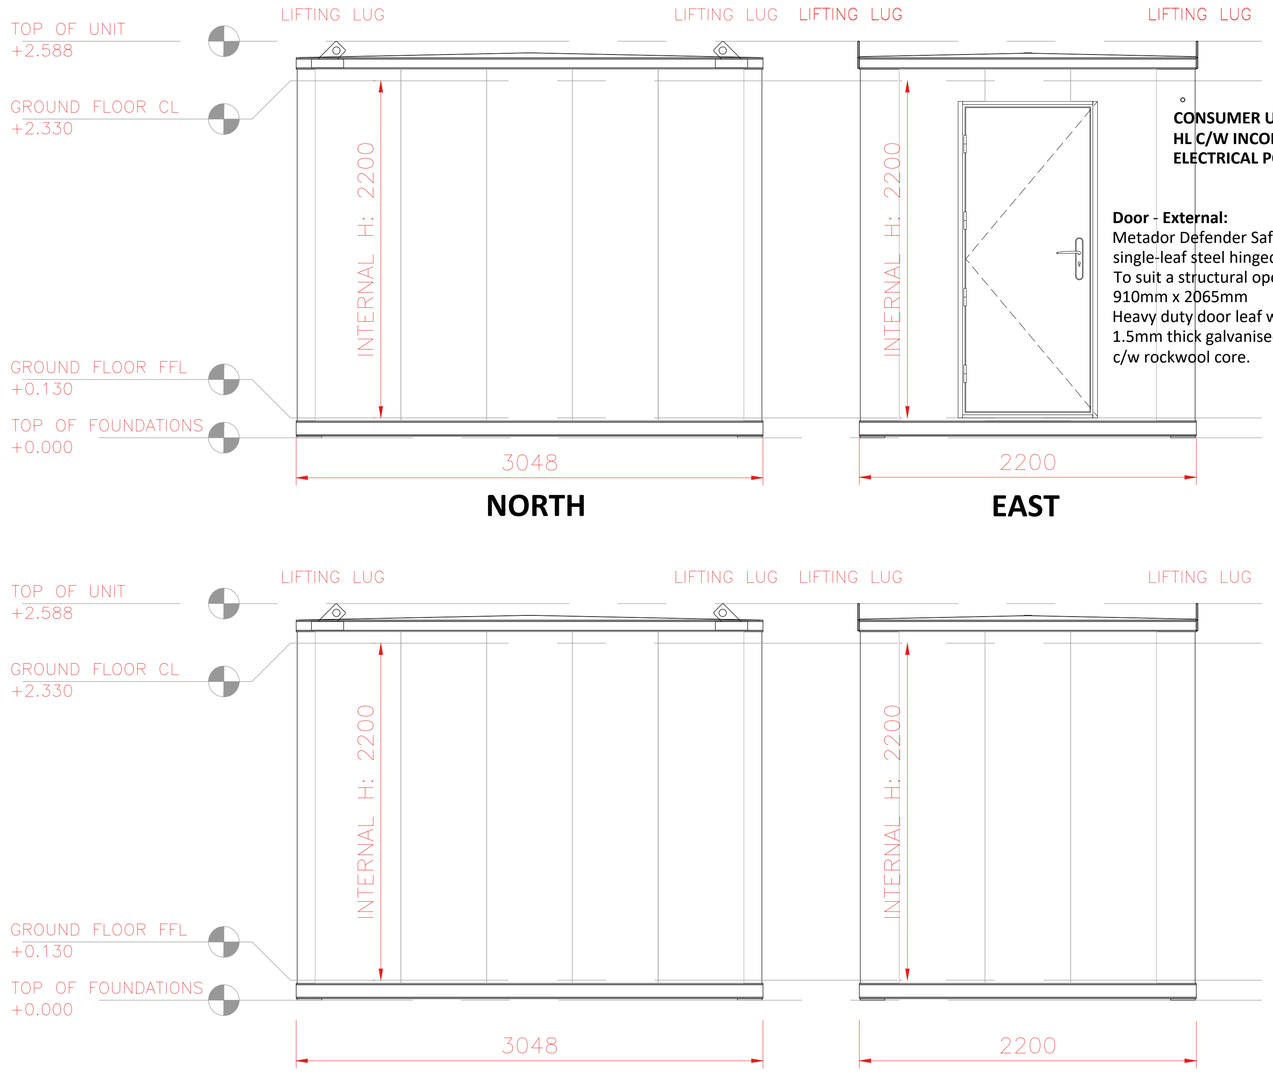

KEY	DESCRIPTION
	CONSUMER UNIT @ HL C/W INCOMING ELECTRICAL POINT
	TWIN SWITCHED OUTLET OR SINGLE SWITCHED OUTLET (@ WORKTOP LEVEL/LOW LEVEL)
	1500mm SINGLE FLUORESCENT TUBE LIGHT
	BULKHEAD LIGHT
PIR	LIGHT SWITCH/ PIR CONTROLLER
	2KW CONVECTION HEATER WITH THERMOSTAT CONTROL (SWITCHED FUSED SPUR)
	2KW HIGH LEVEL FAN HEATER WITH THERMOSTAT CONTROL (SWITCHED FUSED SPUR)
	10 LITRE CAPACITY LOW LEVEL MULTI-POINT WATER HEATER
	5 LITRE CAPACITY OVER SINK WATER HEATER (SWITCHED FUSED SPUR)
	3KW INSTANTANEOUS OVER SINK WATER HEATER (SWITCHED FUSED SPUR)
	HAND DRYER (SWITCHED FUSED SPUR)
	UNDER SINK WATER HEATER (SWITCH SPUR)
	150mm [6"] HIGH LEVEL EXTRACTOR FAN
	DATA POINT NUMBER DENOTES NUMBER OF PORTS
	2 COMPARTMENT DADO PVC TRUNKING
	BENCHING C/W COAT/HAT HOOKS ABOVE
	TOILET & ASSOCIATED FITTINGS (TOILET ROLL HOLDER & HOOK)
	URINAL & ASSOCIATED FITTINGS
	1000mm STAINLESS STEEL KITCHEN SINK C/W TAP AND BASE UNIT UNDERNEATH
	760x760mm SHOWER CUBICLE WITH ELECTRIC SHOWER
	570x420mm WASH HAND BASIN C/W TAP AND MIRROR ABOVE
UPVC	KIRNCROFT 1060x1035mm WINDOW FRAME WITH SHUTTERS
ALU	660x400mm DANZER HL WINDOW FRAME C/W MESH GUARD
	KIRNCROFT 910mm EXTERNAL DOORSET WITH STANDARD FITTINGS
	762mm INTERNAL SAPELE DOOR WITH MORTICE LOCK
	MCWS INLET PIPE AND WASTE OUTLET PIPE
	JACK LEG/CORNER STACKER

STEELWORK NOTES

- EXTERNAL MEASUREMENTS TAKEN FROM OUTSIDE EDGE OF BASE
- STANDARD HEIGHT UNIT
- 2mm FLAT STEEL EXTERIOR
- LIFTING LUGS
- EXTERNAL DOOR – METADOR DEFENDER SAFEGUARD DOOR

COLOUR: T.B.C

ELECTRICAL/MECHANICAL NOTES

- 1no. 1500mm LED TUBE LIGHT
- PIR CONTROLLED LIGHTING
- M&E LAYOUT AND SPECIFICATION TO BE CHECKED AND CONFIRMED

FITTERS NOTES

- 15mm AIR GAP AROUND PERIMETER EDGE OF OSB3 FLOOR BOARDING – ENSURE THAT THIS IS ACHIEVED
- 25mm POLYURETHANE FOAM INSULATION SPRAY APPLIED TO UNDERSIDE OF ROOF
- CEILING TO BE COVERED WITH 15mm PLASTERBOARD, JOINTS COVERED WITH PLASTIC TRIM
- ALUMINIZED POLYESTER LOW-EMISSIVE INSULATING SHEET (FOILTHERM) IS FITTED BEHIND THE CEILING BOARD
- 15mm PLASTERBOARD INTERIOR FINISH (COLOUR: WHITE) C/W ECO-BRITE FOIL INSULATION BACKING, JOINTS COVERED WITH PLASTIC TRIM
- 50mm GLASS WOOL INSULATION W/ BUILDING PAPER AND ALUMINIZED POLYESTER LOW-EMISSIVE INSULATING SHEET (FOILTHERM) TO LINING PANELS
- SLATE GREY POLYFLOR 2MM VINYL IS ADHERED TO THE PLY AND THE JOINTS IN THE VINYL WELDED W/ PLASTIC TRIM
- EXTERNAL DOOR AS SHOWN

TENDER ONLY

DRAWING NOTES

- ALL MEASUREMENTS IN MM UNLESS STATED WITHIN []
- DO NOT SCALE FROM DRAWING – WORK FROM FIGURED DIMENSIONS ONLY: IF IN DOUBT ASK
- PLEASE REPORT ANY DISCREPANCIES TO THE DRAWING OFFICE

ADDITIONAL INFORMATION

REV.	DESCRIPTION	DATE	ID
B	REVISED THE UNIT DIMENSIONS TO ALLOW FOR A UNIT WIDTH OF 2.2M	08.07.22	K.B
A	15mm PLASTERBOARD ADDED	07.07.22	K.B
–	FIRST ISSUE FOR INFORMATION	20.06.22	K.B

CLIENT: RIPLEY CABIN – 4 DERBY ROAD

DZ

PROJECT: 10'X7' (3048mm x 2200mm) UNIT STORAGE UNIT
4 DERBY ROAD
RIPLEY
DE53HR

AV DANZER 0800 389 7610 AVDANZER.CO.UK

CAD FILE NAME: AV-RC-2846

CHECK 1	INITIALS	CHECK 2	INITIALS	CHECK 3	INITIALS	SCALE	DRAWING NO	REV
☒		☐		☐		1:20@A1	L01	B