


PROPOSED LAYOUT

GROUND FLOOR

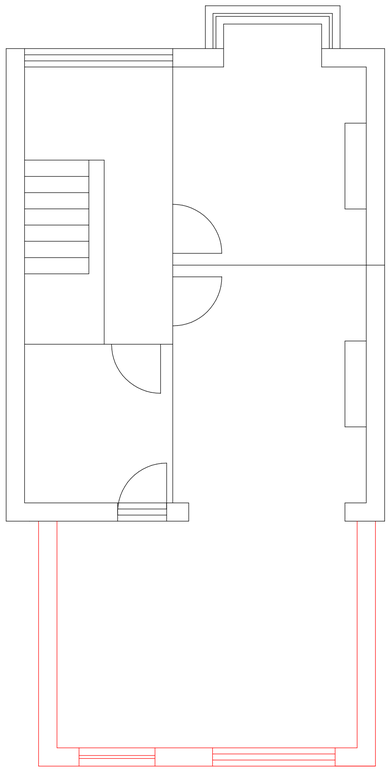


FIRST FLOOR

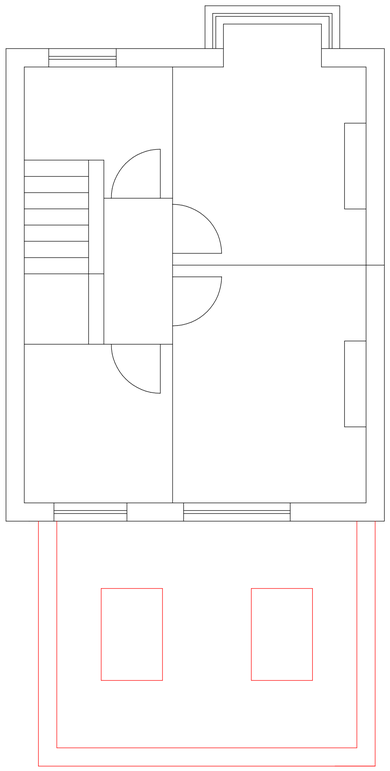

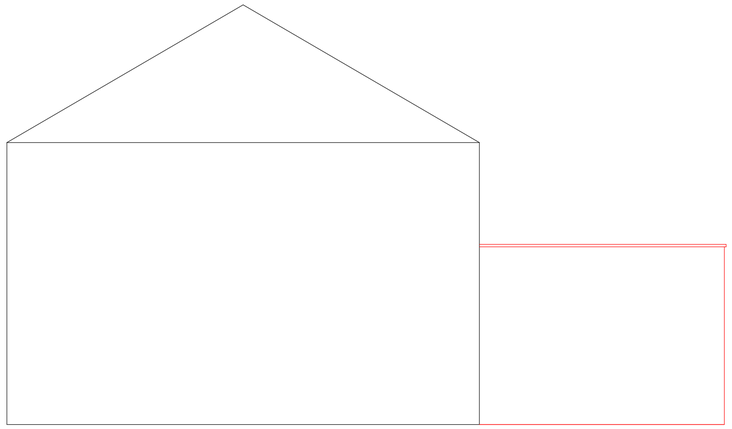


SIDE ELEVATIONS

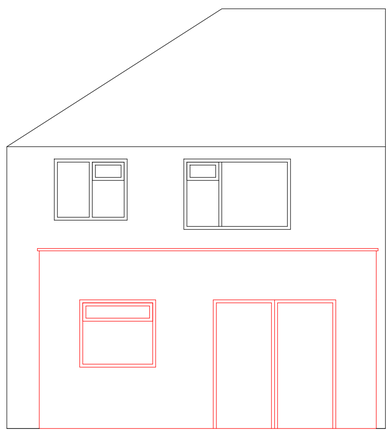

REAR ELEVATION



FRONT ELEVATION

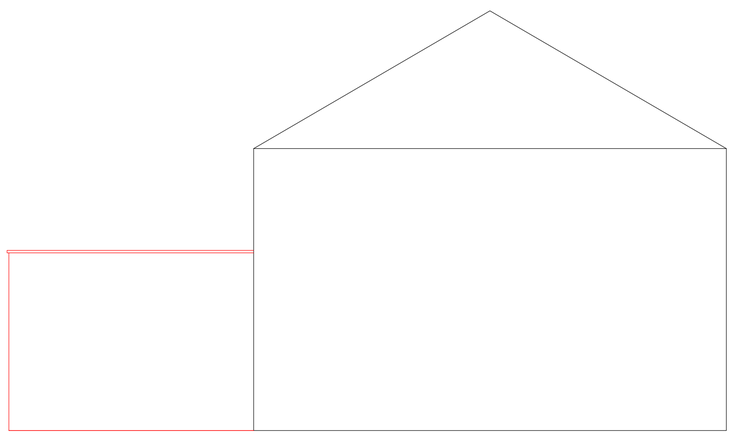

COMMENTS

1. New lintols over opening to be IG L1 s/100 or similar, w/ cavioty tray
2. New Doors/Windows to be double glazed units 1.6W/m2K draught sealed and vented to match
3. All Electrical Works to be carried out in accordance with Document P, carried out by a competent person
4. Internal Course - Thermal Block
   External Couse - Concrete Block and rendered finish

Author	BT
Revision No	3
Scale	1:50 @ A1
Client / Address	Mount Pleasant
Drawing Number	1013