SCALE IN METRES

0 1 2 3 4 5 10 20




step varies from 100mm-200mm prior to layingartificial grass.

adjust levels in patio yard to remove step

Prior to filling to a common level Make adjustment to drains and yard gullies with new c/i gratings fitted to 100mm concrete slab

# NORTH ELEVATION

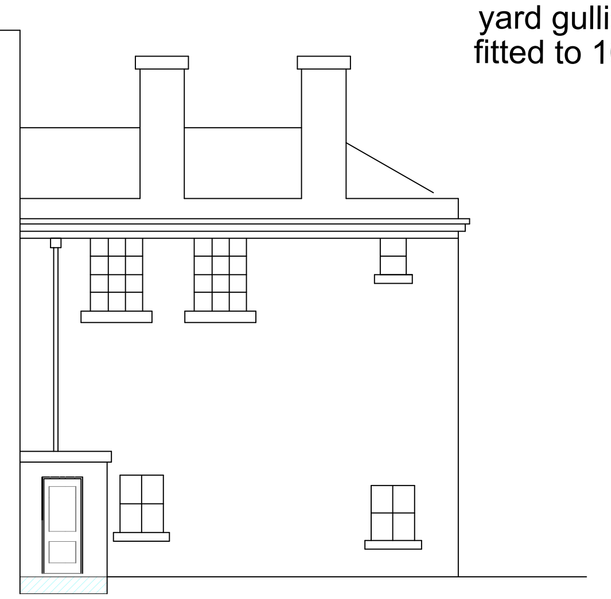

Replace window with new black painted h/w with 2 double glazed fixed panels.

Remove step to patio

# COURTYARD




# section thro lawn

# EAST ELEVATION

Modify ramp and provide railing to existing doorway see drawing 15

# PROPOSED

NOTE: Amended to remove wall-wash lighting

REVISION A 29 July 2026
Green Palisade fence moved to a position behind the Yew Hedge

Copyright retained in accordance with Copyright, Design and Patents Act 1988

GENERAL NOTES

All works are to be constructed in accordance with and to comply with all relevant Building Regulations and good high quality building practice by competent trades people.

All fixings are to be secure and all membranes and DPC's are to perform with complete integrity in locations which are to be agreed with the BCO in advance of installation.

Contractors are to comply with all Health, Safety and Welfare requirements under statutory and CDM Regulations. These include appropriate skills knowledge, training and information for the work involved.

Unless confirmed otherwise ADDC Architects have been appointed as Designers only.

Do not rely on scaling from drawings. Check dimensions against the building and works in advance of all orders and building operations and inform the Architect of any discrepancies immediately.

Project
KINGDOM CHRISTIAN SCHOOL

ALFRETON HALL
Church Street
Alfreton Derbyshire

Scale 1:100@A1
Date May 2026
Drwg 19A

EAST+NORTH ELEVATION

addc
architects planning and heritage consultants

01332 842120

The View
Hazelwood Hill
Hazelwood
BELPER
Derbyshire
DE56 4AD

mikewood@addc-architects.co.uk

www,addc-architects.co.uk